


NET OUTPUT = 147975 PPH SATURATED STEAM @ 1250 PSIG
 CAPACITY = 125.0 mm BTU/HR
 DESIGN PRESSURE: 1350 PSIG
 DESIGN TEMPERATURE: 725°F
 OPERATING PRESSURE: 1250 PSIG

PROPRIETARY INFORMATION
 THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH COMPANY AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH COMPANY.

F.J. = FIELD JOINT

ESTIMATED ASSEMBLED WEIGHT = 400,000 LBS. DRY
 ESTIMATED ASSEMBLED WEIGHT = 450,000 LBS. FULL

125 mm BTU / hr BROACH ONCE THROUGH STEAM GENERATOR

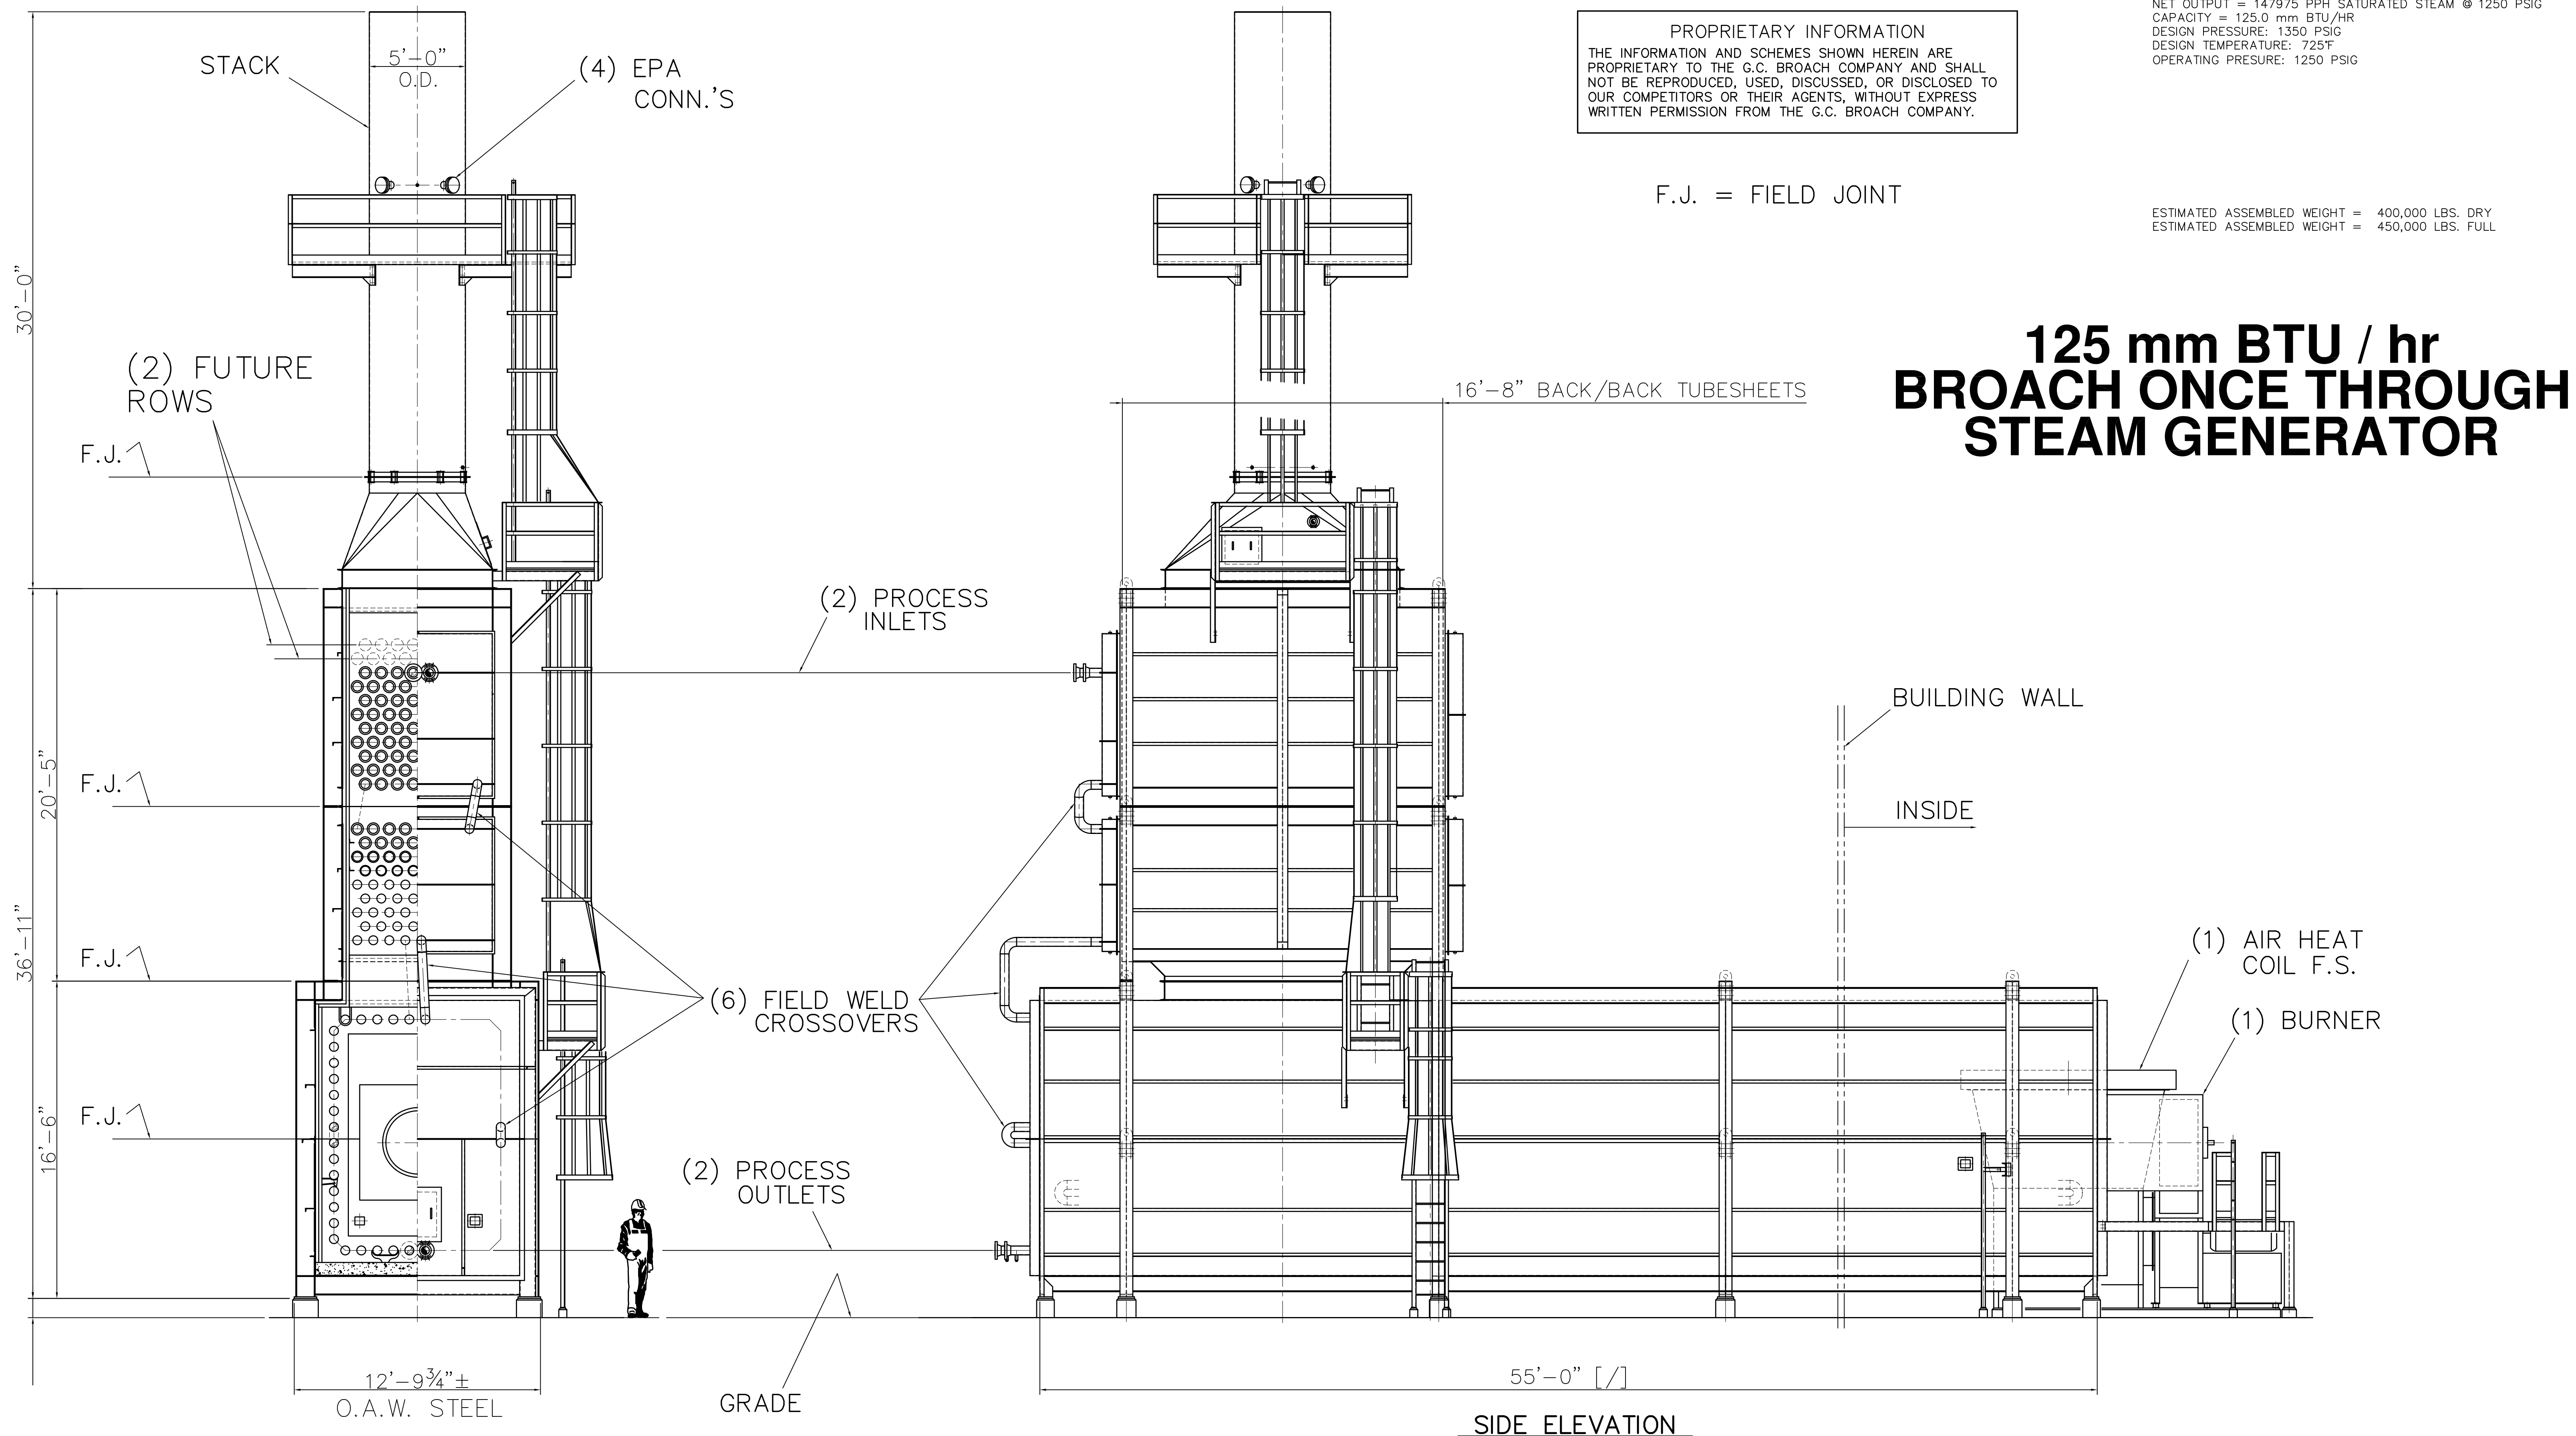

HALF SECTIONAL ELEVATION HALF END ELEVATION
TERMINAL END ELEVATION

SIDE ELEVATION

NOTE!
 WORK THIS DWG. W/ DWG. # SK-14899B-2.

PROPRIETARY INFORMATION
 THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH COMPANY AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH COMPANY.

REVISIONS	FILE NAME: 14899B-1-0	LC #	
	DWN	P.D.D.	06/6/14
	CHK		
	APPR		
	SCALE	1/4" = 1'-0"	

PROCESS HEATERS
BROACH
 THE G.C. BROACH COMPANY • 7667 E. 46TH PLACE • TULSA, OK. 74145

PROPRIETARY INFORMATION
 THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH CO. AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH CO.

125 mm BTU / hr
BROACH ONCE THROUGH
STEAM GENERATOR

JOB NO. P-14899B	DWG NO. SK-14899B-1	REV NO. 0
------------------	---------------------	-----------