


PROPRIETARY INFORMATION
THE INFORMATION AND SCHEMES SHOWN HEREIN ARE
PROPRIETARY TO THE G.C. BROACH COMPANY AND SHALL
NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO
OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS
WRITTEN PERMISSION FROM THE G.C. BROACH COMPANY.

NET OUTPUT = 295,949 PPH SATURATED STEAM @ 1250 PSIG
CAPACITY = 250.0 mm BTU/HR
DESIGN PRESSURE: 1350 PSIG
DESIGN TEMPERATURE: 725°F
OPERATING PRESURE: 1250 PSIG

F.J. = FIELD JOINT

ESTIMATED ASSEMBLED WEIGHT = 600,000 LBS. DRY
ESTIMATED ASSEMBLED WEIGHT = 675,000 LBS. FULL

250 mm BTU / hr BROACH ONCE THROUGH STEAM GENERATOR

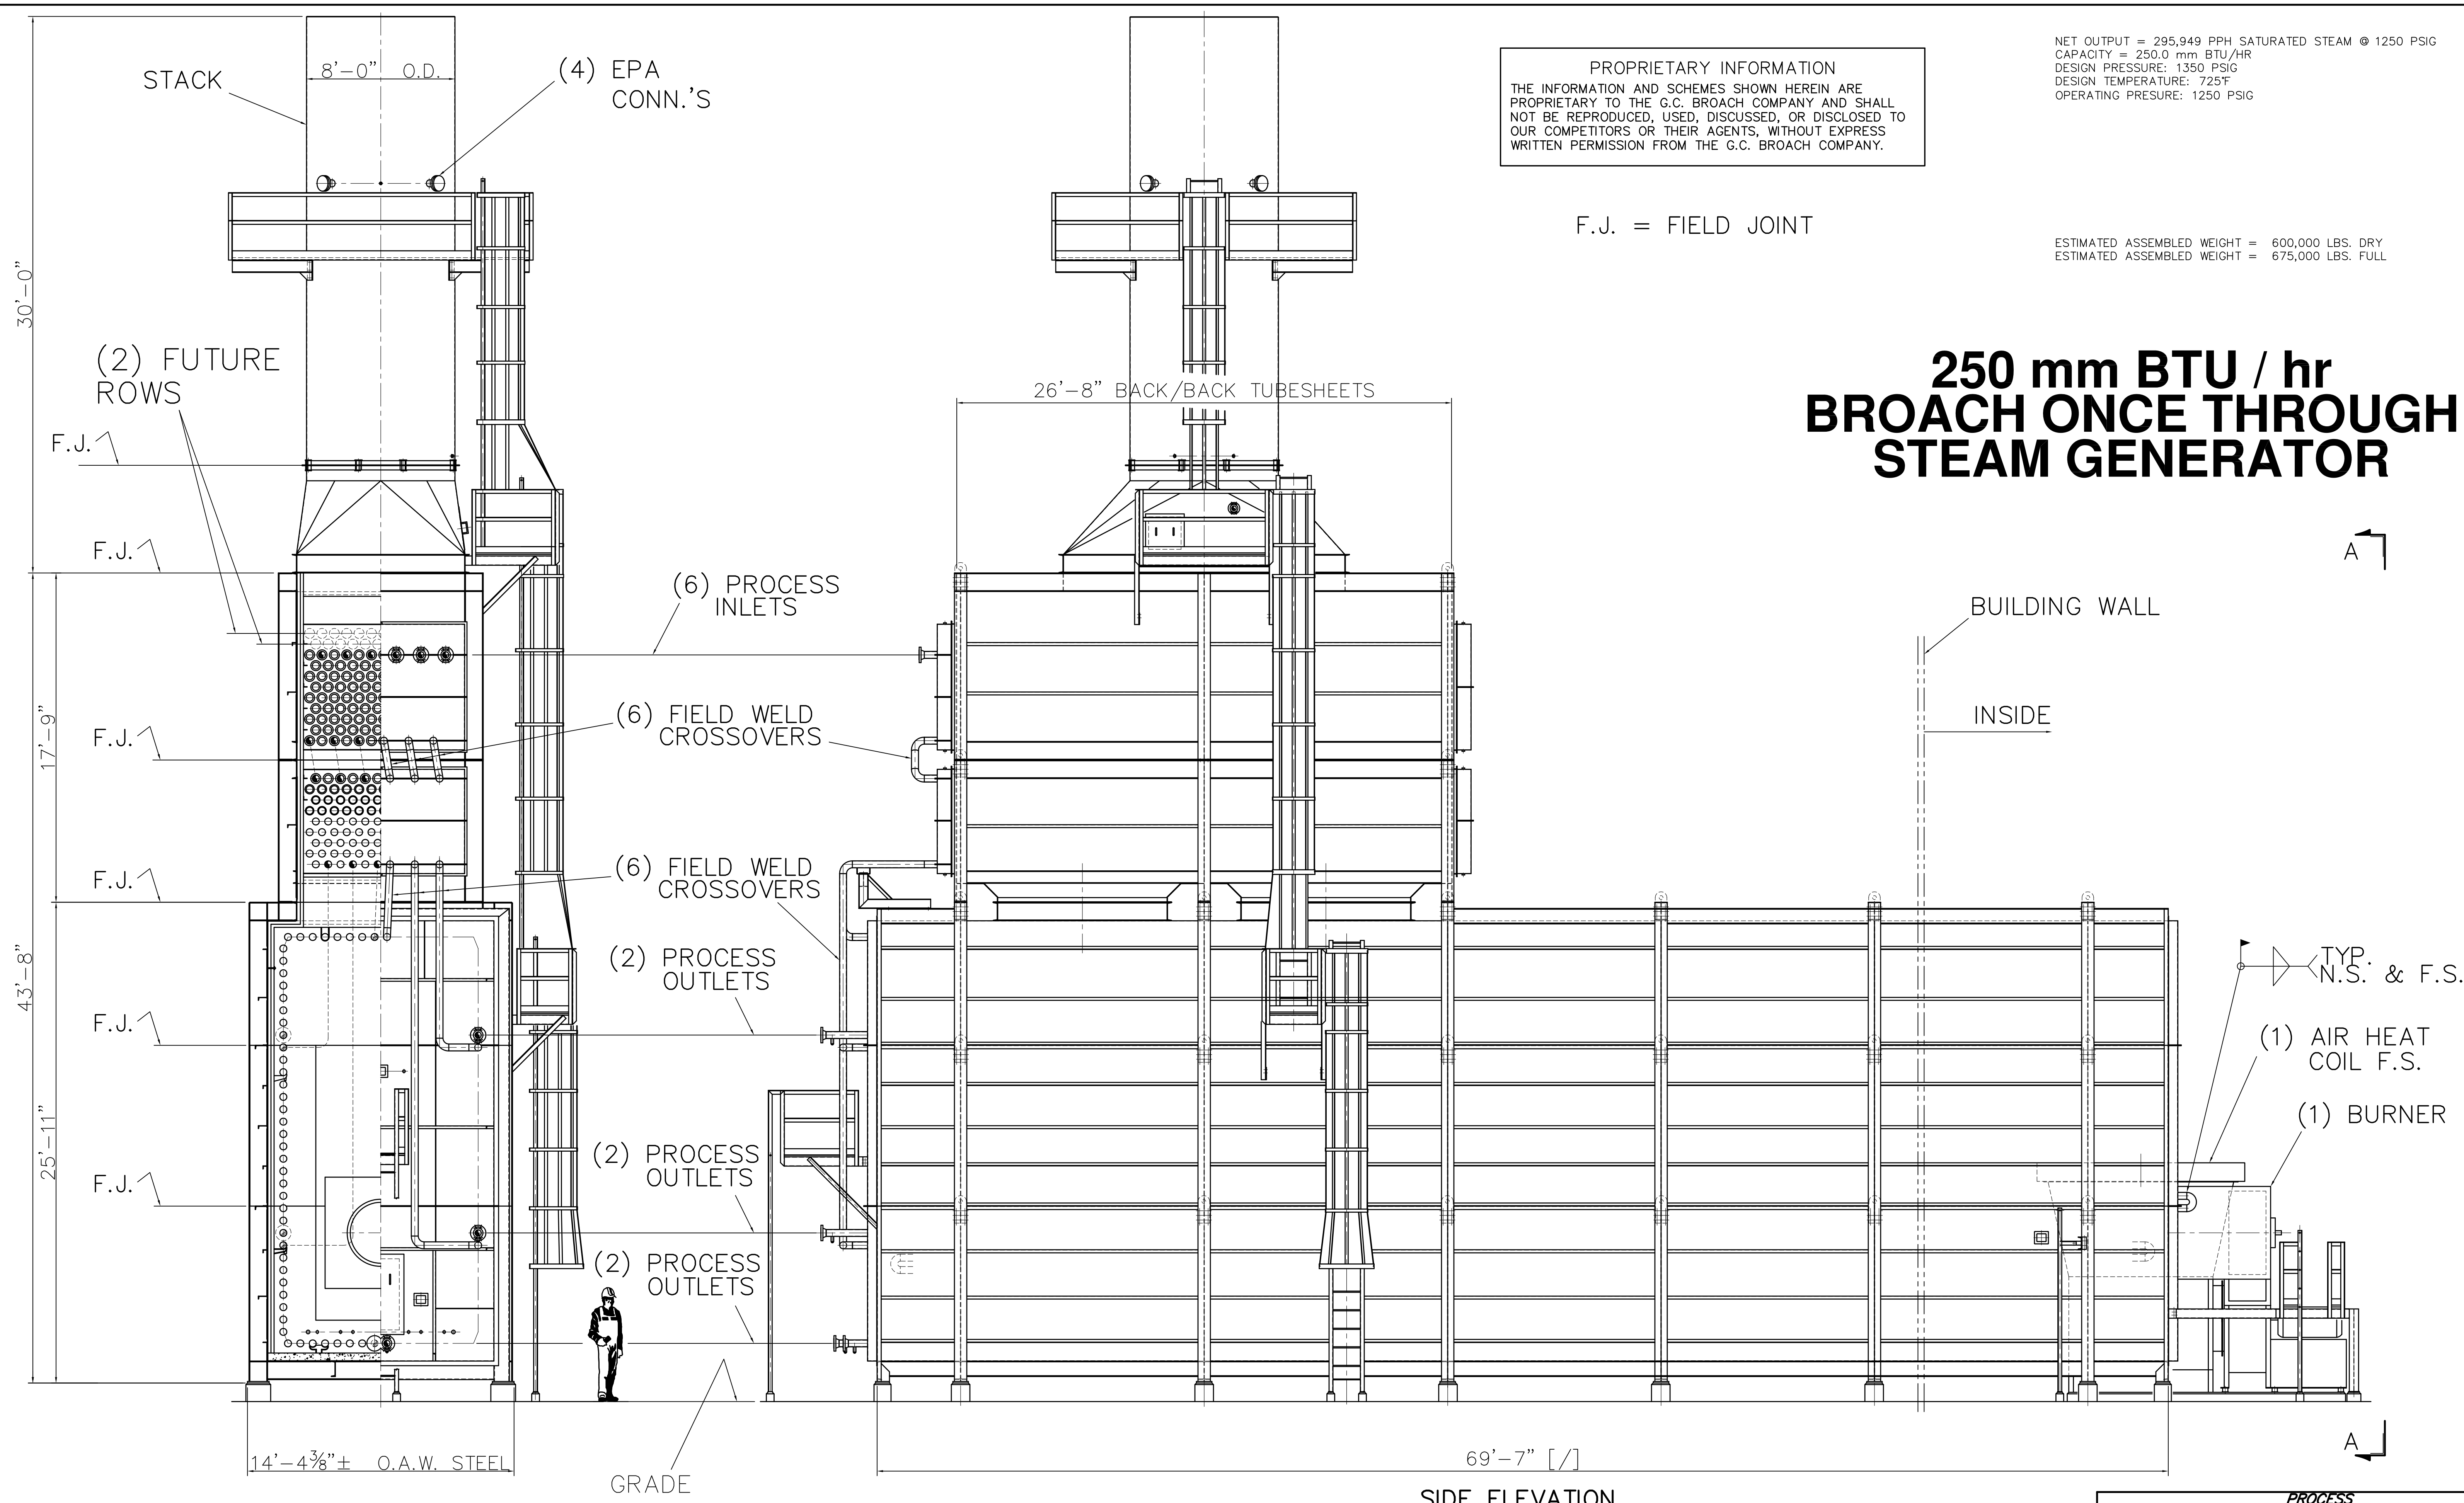

HALF SECTIONAL ELEVATION HALF END ELEVATION
TERMINAL END ELEVATION

SIDE ELEVATION

NOTE!
WORK THIS DWG. W/ DWG. # SK-14899A-2.

PROPRIETARY INFORMATION
THE INFORMATION AND SCHEMES SHOWN HEREIN ARE
PROPRIETARY TO THE G.C. BROACH COMPANY AND SHALL
NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO
OUR COMPETITORS OR THEIR AGENTS, WITHOUT EXPRESS
WRITTEN PERMISSION FROM THE G.C. BROACH COMPANY.

REVISIONS				FILE NAME: 14899A-1-0	LC #
				DWN	P.D.D. 06/6/14
				CHK	
				APPR	
				SCALE	3/8" = 1'-0"

PROCESS HEATERS
BROACH

THE G.C. BROACH COMPANY • 7667 E. 46TH PLACE • TULSA, OK. 74145

PROPRIETARY INFORMATION
THE INFORMATION AND SCHEMES SHOWN HEREIN ARE PROPRIETARY TO THE G.C. BROACH
CO. AND SHALL NOT BE REPRODUCED, USED, DISCUSSED, OR DISCLOSED TO OUR COMPETITORS
OR THEIR AGENTS, WITHOUT EXPRESS WRITTEN PERMISSION FROM THE G.C. BROACH CO.

250 mm BTU / hr
BROACH ONCE THROUGH
STEAM GENERATOR

JOB NO. P-14899A	DWG NO. SK-14899A-1	REV NO. 0
------------------	---------------------	-----------